

TEST REPORT

Report Number : ETL100716.0309 Report issue date: November 22, 2010

Model / Serial No. : W2-310S / NONE

Multiple Model Name : W2-300S

Product Type : Bottled Water Cooler

Brand Name : 

Applicant : HYUNDAI Wacor Tec Co., Ltd.

Address : 684-49, Gongreung-Dong, Nowon-Ku, Seoul, Korea

Manufacturer : HYUNDAI Wacor Tec Co., Ltd.

Address : 684-49, Gongreung-Dong, Nowon-Ku, Seoul, Korea

Test Standard(s) : J55014-1(H20)
CISPR14-1: 1993 + A1: 1996

Test Result : **Positive**

Total pages including Attachments : 32

Prepared by:

Jae Young, Kwon
(Test Engineer)



November 22, 2010

Reviewed by:

Yo Han, Park
(Chief Engineer)



November 22, 2010

ETL Inc.
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Tel : 82-2-858-0786 Fax : 82-2-858-0788

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

DIRECTORY

		Pages
A) Documentation		
Directory		2
Test Standards		3
Address of the test laboratory, Conditions/Power Utilized, Description of the EUT & Symbol Definitions		4
Equipment Under Test		8
General Remarks & Summary		9
Test Setups (Photographs)		10 – 12
B) Test Data		
Conducted Emissions	150 kHz - 30 MHz	5
Disturbance Power	30 MHz - 300 MHz	6
Discontinuous Disturbance	150 kHz, 500 kHz, 1.4 MHz, 30 MHz	7
C) Attachment		
A. Test Data and Test Setup Drawing(s)		A1 – A12
B. List of Test Equipments		B1 – B2
C. Photo documentations		C1 – C4
D. Technical description of the test sample		D1 – D2

TEST STANDARD(S)

The emc tests were performed according to the following standards:

- J55014-1(H20)
- CISPR14-1: 1993 + A1: 1996

ADDRESS OF THE TEST LABORATORY

Seoul EMC Laboratory

#371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

Hwaseong Open Area Test Site

#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si, Gyeonggi-do, 445-882, Korea

ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature : 15 °C - 35 °C
Humidity : 30 %R.H. - 60 %R.H.
Atmospheric Pressure : 86 kPa - 106 kPa

POWER SUPPLY SYSTEM UTILIZED

Power supply system AC 100 V; 50 Hz/60 Hz; 2.0 A (Cold); 400 W (Hot)

SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)

Number of received / tested samples: 1 / 1

Serial Number: none

VOLTAGE RANGE TEST

Preliminary test has been performed with voltage conditions of from 100 V (50 Hz / 60 Hz) at the frequencies of 160 kHz and 50 MHz to determine maximum disturbance voltage condition.
A test at about 160 kHz and at about 50 MHz shall be made over a range of 0.9 to 1.1 times the rated voltage in order to check whether the level of disturbance varies considerably with the supply voltage.
The frequencies of 160 kHz measurement result is maximum disturbance voltage condition.
But the frequency of 50 MHz measurement result is no maximum disturbance voltage condition. So conducted emissions test condition is AC 110 V, 50 Hz and AC 110 V, 60 Hz. And discontinuous disturbance emissions test condition is normal AC 110 V, 50 Hz and AC 110 V, 60 Hz

DEFINITIONS FOR SYMBOLS USED IN THIS TEST REPORT

The black square indicates that the listed condition, standard or equipment is applicable for this report.

Blank box indicates that the listed condition, standard or equipment was not applicable for this report.

Discontinuous Disturbance Emissions Test

Discontinuous disturbance emissions from 148.5 kHz to 30 MHz were measured with a bandwidth of 9 kHz according to the methods defined in J55014-1(H20).

The EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference plane and placed 0.4 m from a vertical ground plane which is connected to the horizontal metal ground plane.

Test not applicable

■ Test area - shielded room

Used test instruments and test accessories please see Attachment B.

■ Pass

Fail

Remarks: Please refer to the test data in Attachment A.

Equipment Under Test (EUT) Test Operation Mode:

The equipment under test was operated under the following conditions during testing:

- Standby mode
- During the test, EUT was the continuous cooling & heating mode hold down that the discharge water periodically

Configuration of the equipment under test:

- See constructional data form in Attachment D - Page D2
- See product information form(s) in Attachment D - Page D3

The following devices and interface cables were connected during the testing:

Peripheral devices

	Type	Model	Serial No.	Manufacturer
<input type="checkbox"/>	-	-	-	-

Type of Cables Used

Device from	Device to	Type of Cable(Port)	Length[m]	Type of shield
EUT	Power socket	AC Input	1.5	Unshielded

GENERAL REMARKS:

The Equipment Under Test (EUT) is the Bottled Water Cooler (model: W2-310S)

The model W2-310S is basic model that was tested.

The multi model W2-300S is identical to basic model, except for model designation and external design.

SUMMARY:

All tests according to the regulations cited on page 3 were

- Performed
- Not Performed

The Equipment Under Test

- **Fulfills** the general approval requirements cited on page 3.
- **Does not** fulfill the general approval requirements cited on page 3.

Date of receipt of test sample:	July 16, 2010
Test start date:	August 12, 2010
Test end date:	August 13, 2010

Photograph of test setup: Conducted emissions 150 kHz - 30 MHz



Photograph of test setup: Disturbance Power



Photograph of test setup: Discontinuous Disturbance



Attachment A

Test Data
and
Test Setup Drawing(s)

Conducted Emissions Measurement

EUT	Bottled Water Cooler / W2-310S (S/N: N/A)
Limit apply to	J55014-1(H20)
Test Date	August 12, 2010
Operating Condition	During the test, EUT was the continuous cooling & heating mode hold down that the discharge water periodically
Operating Spec.	110 V, 50 Hz
Result	Passed by 30.01 dB

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

Frequency [MHz]	Result [dB(μ V)]		Phase (*H/**N)	Limit [dB(μ V)]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.195	31.05	-	N	63.82	-	32.77	-
0.282	29.87	-	N	60.76	-	30.89	-
0.320	22.15	-	H	59.71	-	37.56	-
0.589	21.85	-	N	56.00	-	34.15	-
0.655	22.04	-	N	56.00	-	33.96	-
0.780	25.29	-	N	56.00	-	30.71	-
19.060	27.97	-	H	60.00	-	32.03	-
22.090	28.68	-	N	60.00	-	31.32	-
24.100	29.99	-	N	60.00	-	30.01	-

NOTES:


- * H : HOT Line , **N : Neutral Line
- Margin value = Limit – Result
- All conditions were investigated and the worst-case emissions are reported.
- If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.




Jae Young, Kwon
Test Engineer


Line Polarity : Hot

Limit : - - - Quasi-Peak
 ····· Average

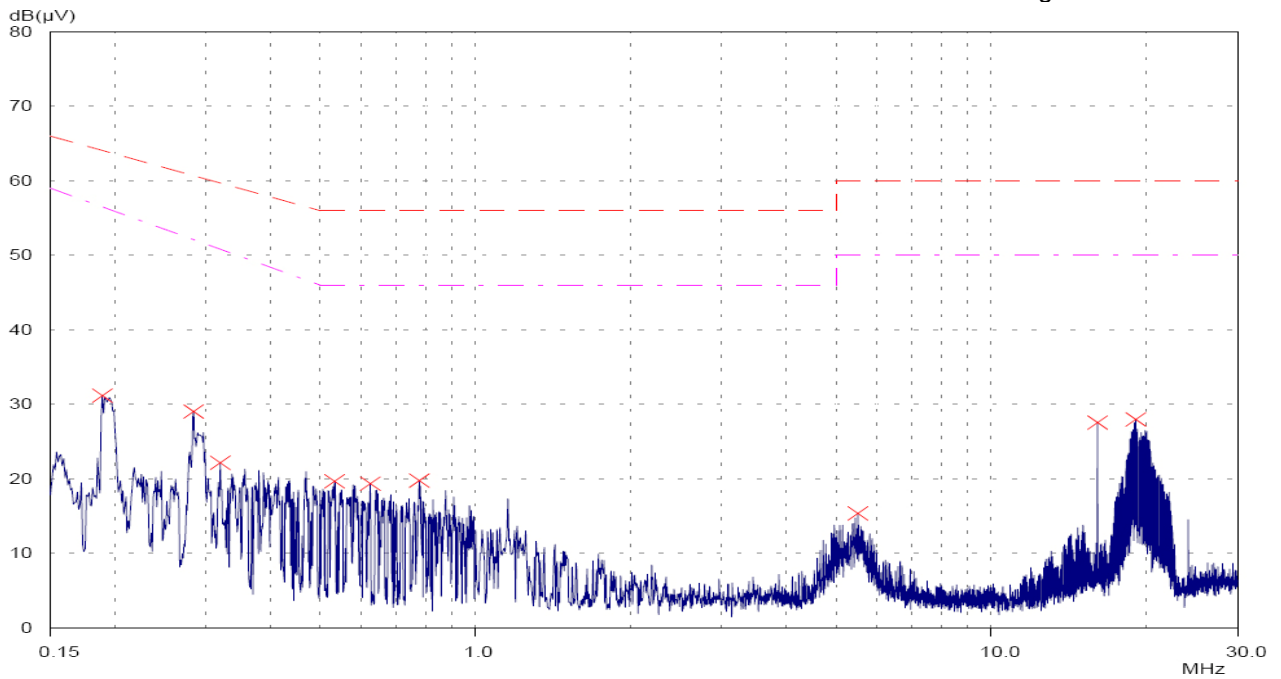

Line Polarity : Neutral

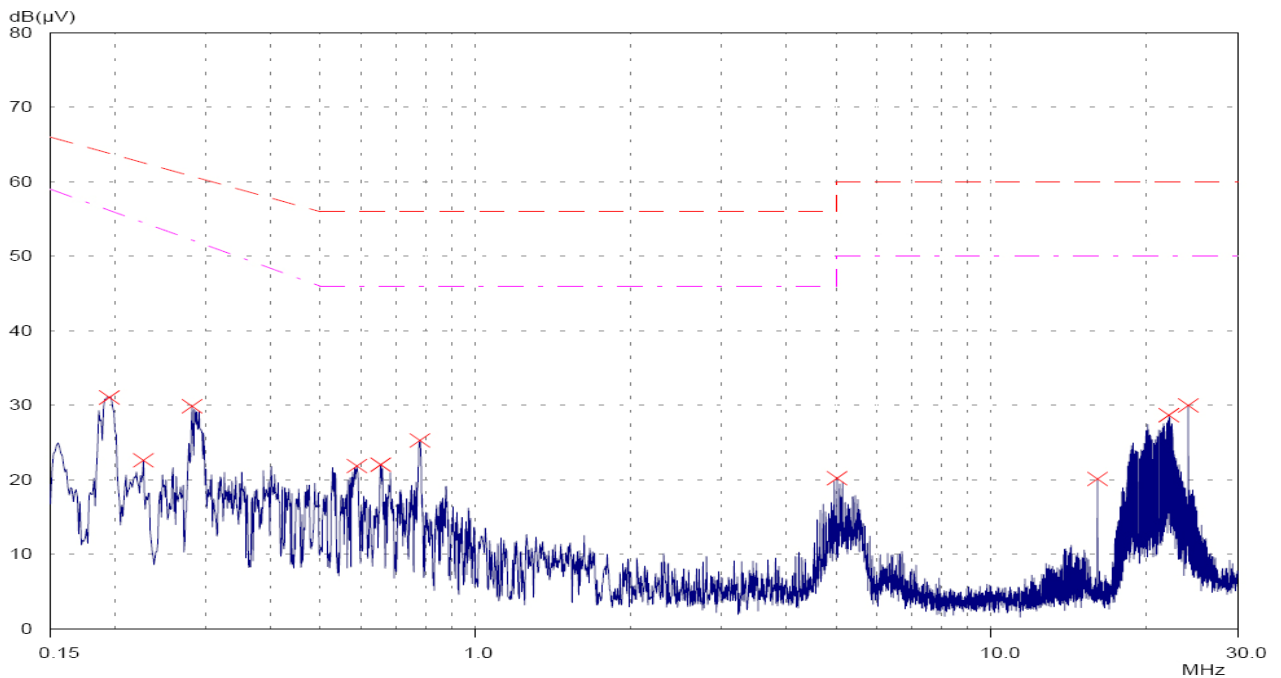

Quasi-peak 

EUT	Bottled Water Cooler / W2-310S (S/N: N/A)
Limit apply to	J55014-1(H20)
Test Date	August 12, 2010
Operating Condition	During the test, EUT was the continuous cooling & heating mode hold down that the discharge water periodically
Operating Spec.	110 V, 60 Hz
Result	Passed by 24.54 dB

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

Frequency [MHz]	Result [dB(μ V)]		Phase (*H/**N)	Limit [dB(μ V)]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.194	32.30	-	N	63.86	-	31.56	-
0.219	29.49	-	N	62.86	-	33.37	-
0.293	31.09	-	N	60.44	-	29.35	-
0.591	27.22	-	N	56.00	-	28.78	-
0.658	28.13	-	H	56.00	-	27.87	-
0.778	31.46	-	N	56.00	-	24.54	-
5.745	19.01	-	N	60.00	-	40.99	-
16.070	28.54	-	H	60.00	-	31.46	-
18.760	27.67	-	H	60.00	-	32.33	-

NOTES:


- * H : HOT Line , **N : Neutral Line
- Margin value = Limit – Result
- All conditions were investigated and the worst-case emissions are reported.
- If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.




Jae Young, Kwon
Test Engineer


Line Polarity : Hot

Limit : - - - Quasi-Peak
 ····· Average

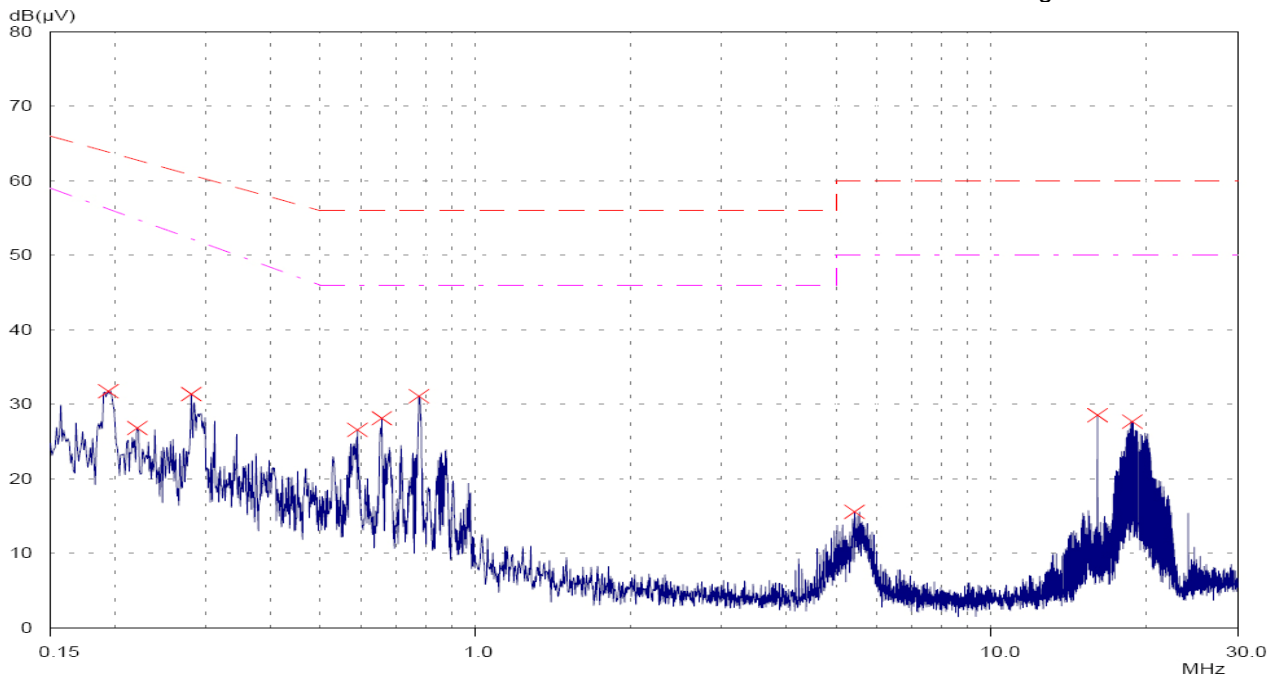

Line Polarity : Neutral

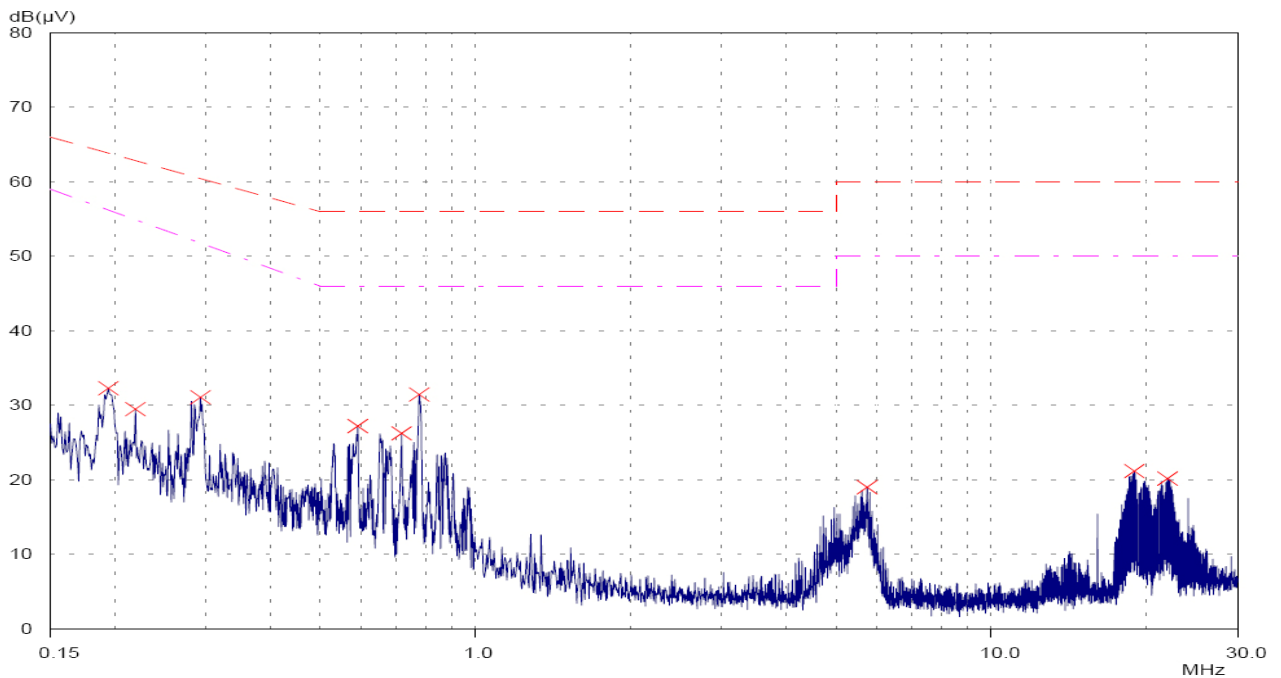

Quasi-peak 

Disturbance Power Measurement

EUT	Bottled Water Cooler / W2-310S (S/N: N/A)
Limit apply to	J55014-1(H20)
Test Date	August 13, 2010
Operating Condition	During the test, EUT was the continuous cooling & heating mode hold down that the discharge water periodically
Operating Spec.	110 V, 50 Hz
Result	Passed by 5.61 dB

Disturbance Power Test Data

Frequency [MHz]	Result [dB(pW)]		Limit [dB(pW)]		Margin [dB]	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
32.250	30.40	29.47	45.08	35.08	14.68	5.61
125.100	25.09	24.87	48.52	38.52	23.43	13.65
130.100	29.88	29.56	48.71	38.71	18.83	9.15



Jae Young, Kwon
Test Engineer



RBW 120 kHz

MT 100 ms


Att 10 dB

PREAMP OFF

[dB(pW)]

1 QP
MAXH

2 AV
MAXH

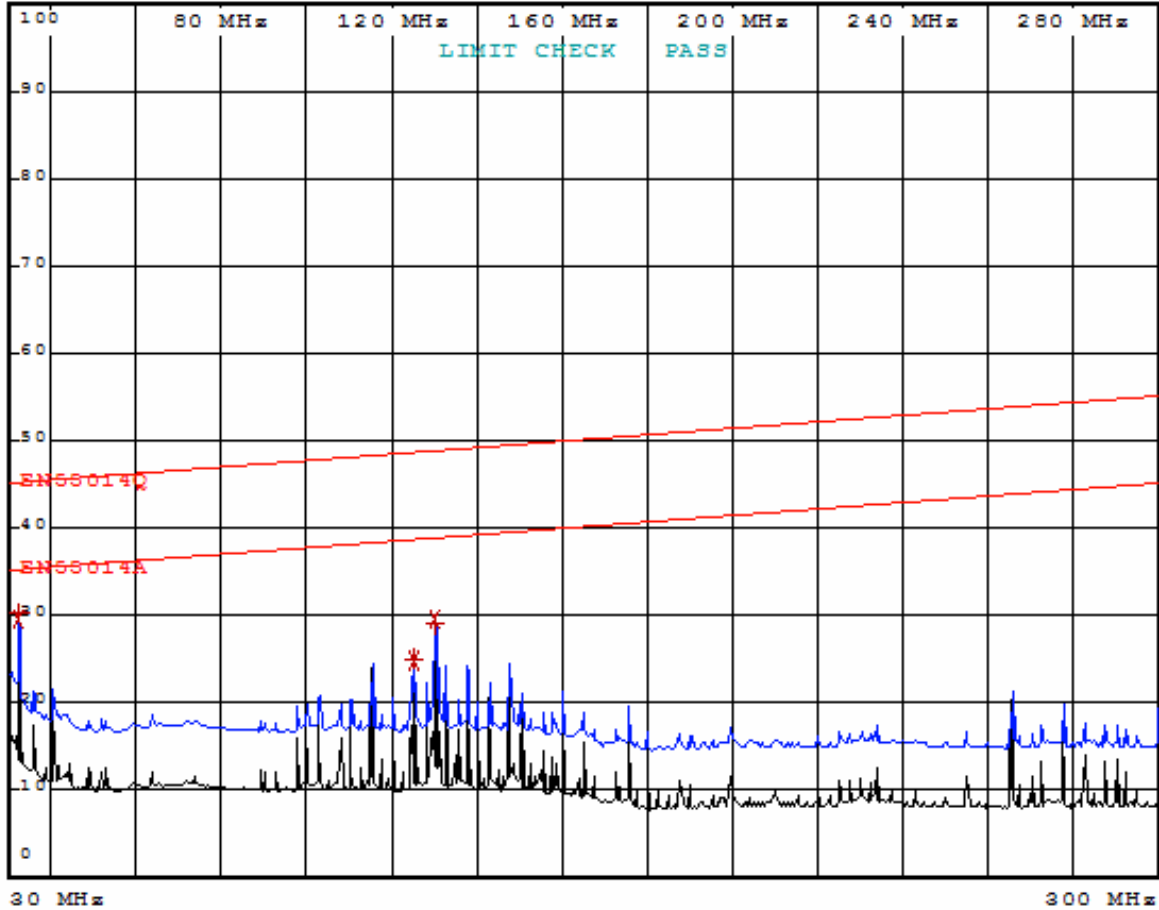

TEST REPORT

EUT	Bottled Water Cooler / W2-310S (S/N: N/A)
Limit apply to	J55014-1(H20)
Test Date	August 13, 2010
Operating Condition	During the test, EUT was the continuous cooling & heating mode hold down that the discharge water periodically
Operating Spec.	110 V, 60 Hz
Result	Passed by 5.56 dB

Disturbance Power Test Data

Frequency [MHz]	Result [dB(pW)]		Limit [dB(pW)]		Margin [dB]	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
32.250	30.31	29.52	45.08	35.08	14.77	5.56
125.100	25.09	24.84	48.52	38.52	23.43	13.68
130.100	29.18	28.71	48.71	38.71	19.53	10.00



Jae Young, Kwon
Test Engineer




RBW 120 kHz

MT 100 ms

Att 10 dB

PREAMP OFF

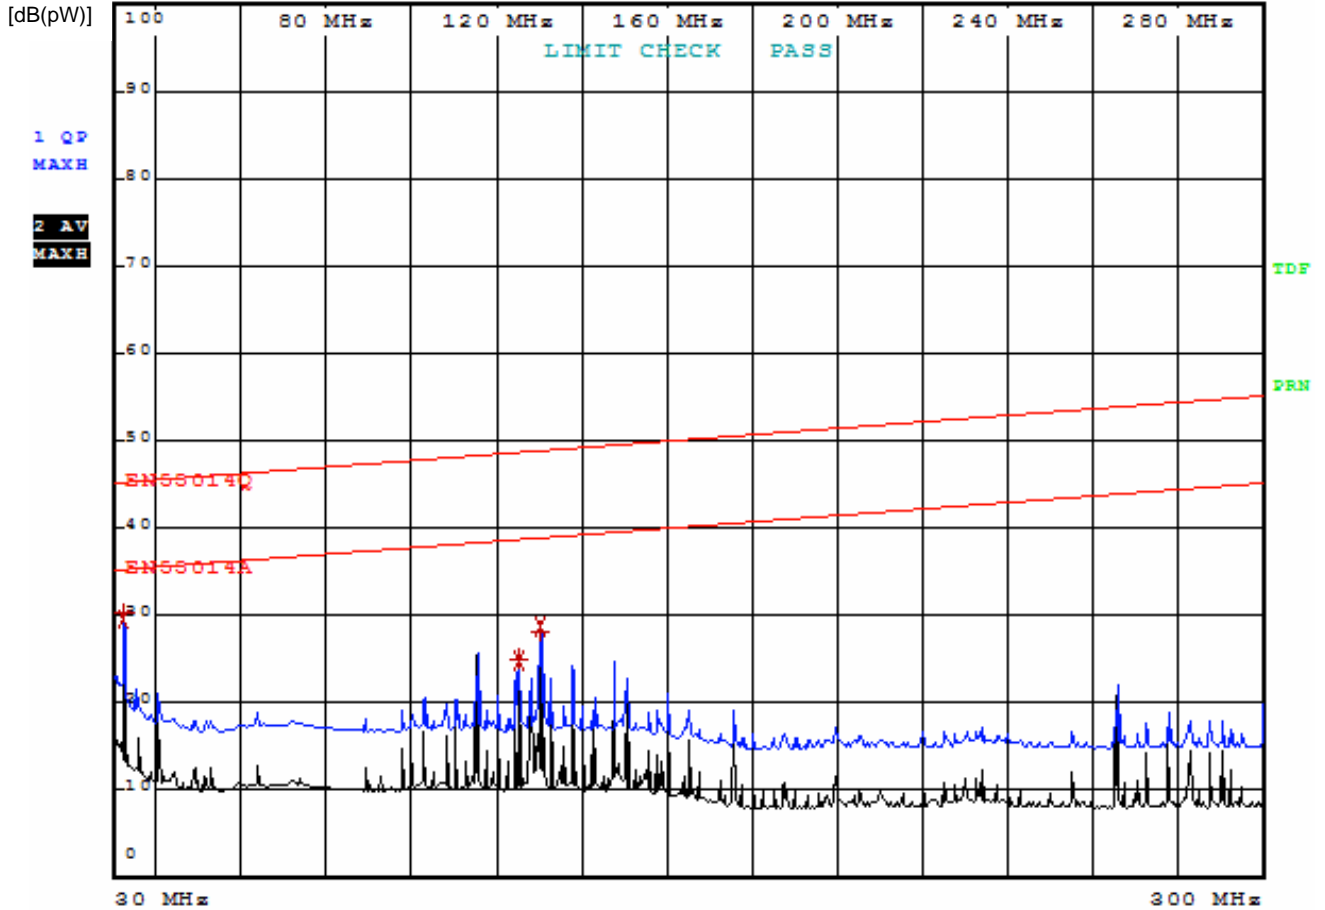

Discontinuous Disturbance Measurement

EUT	Bottled Water Cooler / W2-310S (S/N: N/A)
Limit apply to	J55014-1(H20)
Test Date	August 12, 2010
Operating Condition	During the test, EUT was the continuous cooling & heating mode hold down that the discharge water periodically
Result	Passed

Phase : Hot(dB μ V)

Click	150 kHz	500 kHz	1.4 MHz	30 MHz
1	0	0	0	0
2	0	0	0	0
3	0	0	0	0
4	0	0	0	0
5	0	0	0	0
6	0	0	0	0
7	0	0	0	0
8	0	0	0	0
9	0	0	0	0
10	0	0	0	0
11	0	0	0	0
12	0	0	0	0
13	0	0	0	0
14	0	0	0	0
15	0	0	0	0
16	0	0	0	0
17	0	0	0	0
18	0	0	0	0
19	0	0	0	0
20	0	0	0	0

Click	150 kHz	500 kHz	1.4 MHz	30 MHz
21	0	0	0	0
22	0	0	0	0
23	0	0	0	0
24	0	0	0	0
25	0	0	0	0
26	0	0	0	0
27	0	0	0	0
28	0	0	0	0
29	0	0	0	0
30	0	0	0	0
31	0	0	0	0
32	0	0	0	0
33	0	0	0	0
34	0	0	0	0
35	0	0	0	0
36	0	0	0	0
37	0	0	0	0
38	0	0	0	0
39	0	0	0	0
40	0	0	0	0

$$L_c = 20 \log(30/N) =$$

$$N = \text{Click} / \text{min}$$

$$\text{Click} = 10 \text{ ms} < C \text{ time} < 200 \text{ ms}$$

(Industry machine + 10 dB)

Measurement Relay Time; 5 min

$$N < 0.2$$

$$0.2 < N < 30$$

$$N > 30$$

$$(5\text{min}) + 44 \text{ dB}$$

$$+ L_c$$

$$(2\text{sec}) + 0 \text{ dB}$$

Click Frequency	150 kHz	500 kHz	1.4 MHz	30 MHz
Contin.Limit L st	66	56	56	60
Click Rate	0	0	0	0
Click level Lc	44	44	44	44
L = Lc + Lst	110	100	100	104
Number of Click	0	0	0	0
Number over limit	0	0	0	0
Passed	PASS	PASS	PASS	PASS

REMARKS:

Phase : Neutral(dB, μV)

Click	150 kHz	500 kHz	1.4 MHz	30 MHz
1	0	0	0	0
2	0	0	0	0
3	0	0	0	0
4	0	0	0	0
5	0	0	0	0
6	0	0	0	0
7	0	0	0	0
8	0	0	0	0
9	0	0	0	0
10	0	0	0	0
11	0	0	0	0
12	0	0	0	0
13	0	0	0	0
14	0	0	0	0
15	0	0	0	0
16	0	0	0	0
17	0	0	0	0
18	0	0	0	0
19	0	0	0	0
20	0	0	0	0

Click	150 kHz	500 kHz	1.4 MHz	30 MHz
21	0	0	0	0
22	0	0	0	0
23	0	0	0	0
24	0	0	0	0
25	0	0	0	0
26	0	0	0	0
27	0	0	0	0
28	0	0	0	0
29	0	0	0	0
30	0	0	0	0
31	0	0	0	0
32	0	0	0	0
33	0	0	0	0
34	0	0	0	0
35	0	0	0	0
36	0	0	0	0
37	0	0	0	0
38	0	0	0	0
39	0	0	0	0
40	0	0	0	0

$L_c = 20\log(30/N) =$

$N = \text{Click} / \text{min}$

Click = 10ms < C time < 200ms

(Industry machine + 10dB)

Measurement Relay Time; 5 min

$N < 0.2$

$0.2 < N < 30$

$N > 30$

(5min) + 44dB


+ L_c

(2sec) + 0dB

Click Frequency	150 kHz	500 kHz	1.4 MHz	30 MHz
Contin.Limit L st	66	56	56	60
Click Rate	0	0	0	0
Click level L_c	44	44	44	44
$L = L_c + L_{st}$	110	100	100	104
Number of Click	0	0	0	0
Numer over limit	0	0	0	0
Passed	PASS	PASS	PASS	PASS

REMARKS:

The setup drawing(s)

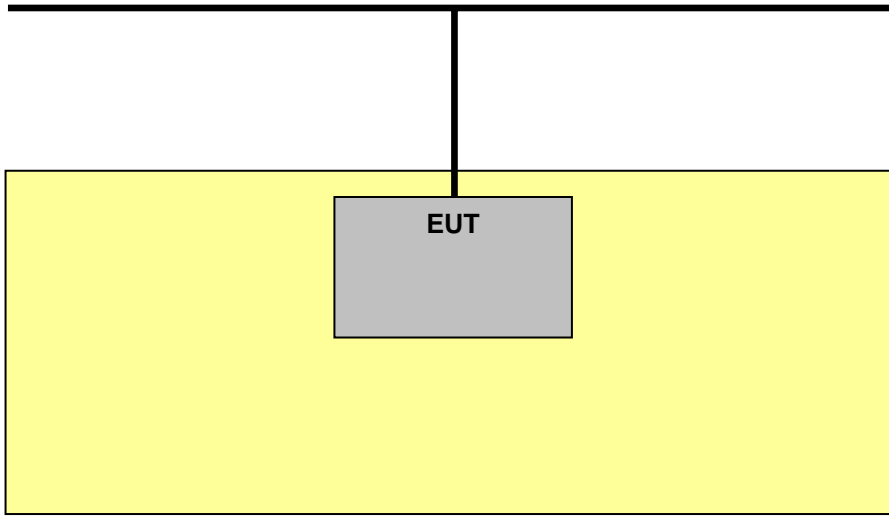

————— : Data Line
————— : Power Line

Attachment B

List of Test Equipment

Emission Test Equipments

	Description	Model Number	Manufacturer	Serial Number	Cal Due Date
■	EMI TEST Receiver	ESHS 30	R & S	840190/002	11.04.02
■	EMI TEST Receiver	ESPI3	R & S	100478	11.09.18
■	LISN	3825/2	EMCO	9208-1995	11.09.17
■	Absorbing Clamp	MDS-21	R & S	831676/013	11.03.31

Attachment C

Constructional Photographs
of
Equipment Under Test (EUT)

View of front



View of rear



View of inside



Attachment D

Constructional Data Form

and

Product Information Form(s)

CONSTRUCTION DATAFORM FOR EMC – TESTING

Applicant : HYUNDAI Wacor Tec Co., Ltd.
 Address : 684-49, Gongreung-Dong, Nowon-Ku, Seoul, Korea
 Factory : HYUNDAI Wacor Tec Co., Ltd.
 Address : 684-49, Gongreung-Dong, Nowon-Ku, Seoul, Korea

Type	: Bottled Water Cooler	Rated voltage	: AC 100 V; 50 Hz/60 Hz; 2.0 A (Cold)
Serial No.	: NONE	Rated input power	: 400 W (Hot)
Protection type	:	Protection class	:

Configuration of equipment:

	Rev. :
	Rev. :
	Rev. :

Source of interference :
 Internal frequency :
 Noise suppression components :
 Measures for electromagnetic shielding :

Place of issue	date	Seal and signature of applicant
----------------	------	---------------------------------

If applicable, if necessary complete overleaf

End of test report